


ESA Series

3-10kW/5-48kWh | Single Phase Home Storage Solution (HV)

The GoodWe ESA Series is a fully integrated all-in-one solar and storage solution that combines inverter and battery in a pre-wired, modular design-making installation significantly faster and easier. Engineered for flexibility, the ESA system allows seamless expansion to meet evolving energy needs. 5kWh and 8kWh battery modules support 1C charging/discharging and can be mixed in a single stack up to 48kWh, with up to 6x stacks in parallel. The ESA provides UPS-level, full house back-up (63A) with no gateway needed. Models feature 2-4 MPPTs, each supporting up to 26A short-circuit input current. Safety features include 6-level battery protection and AI-driven AFCI 3.0 as standard, plus low noise levels of <35dB makes the ESA suitable for a wide variety of applications.

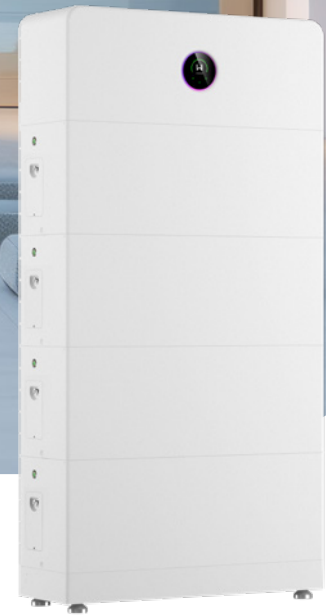

*Initial stock may be supplied in a gloss white finish.



Optimized Performance

- 1C charge/discharge for rapid energy cycling
- Fanless design for quiet operation, noise <30dB
- 20A per string & 200% PV oversizing



Superb Safety & Reliability

- Advanced 6-layer safety protection
- Heating mode ensures reliable performance even in -20°C
- AI-driven AFCI 3.0 for safety¹



Flexible & Adaptable Applications

- Dual output ports for simplified installation & off-grid capability
- Flexible battery mixing with different capacity or old&new batteries
- Support full backup load with 63A×5 output



Smart Control & Monitoring

- Seamless switching to backup <4ms
- One-click upgrade & one-click configuration

Technical Data	GW3K-BHA G20	GW3.6K BHA-G20	GW5K-BHA G20	GW6K-BHA G20	GW8K-BHA G20	GW9.999K BHA-G20
Battery Side						
Battery Type	Li-ion					
Nominal Voltage (V)	380					
Voltage Range (V)	350 ~ 550					
Start-up Voltage (V)	380					
Number of Battery Inputs	1					
Max. Continuous Charging Current (A)	7.9	9.5	13.2	15.8	21.1	26.4
Max. Continuous Discharging Current (A)	8.7	10.5	14.5	17.4	23.2	29.0
Max. Charging Power (kW)	3.0	3.6	5.0	6.0	8.0	9.999
Max. Discharging Power (kW)	3.3	3.96	5.5	6.6	8.8	11.0
AC Side (On-grid)						
Rated Power (kW)	3.0	3.6	5.0	6.0	8.0	9.999
Max. Power (kW)	3.0	3.6	5.0	6.0	8.0	9.999
Rated Apparent Power from Grid (kVA)	3.0	3.6	5.0	6.0	8.0	9.999
Rated Apparent Power to Grid (kVA)	3.0	3.6	5.0	6.0	8.0	9.999
Max. Apparent Power to Grid (kVA)	3.0	3.6	5.0	6.0	8.0	9.999
Max. Apparent Power from Grid (kVA)	6.0	7.2	10.0	12.0	14.5	14.5
Nominal Voltage (V)	220 / 230 / 240, L / N / PE					
Voltage Range (V)	170 ~ 280					
Nominal Frequency (Hz)	50 / 60					
Frequency Range (Hz)	45 ~ 55 / 55 ~ 65					
Rated Current from Grid (A)	13.7 @ 220V	16.4 @ 220V	22.8 @ 220V	27.3 @ 220V	36.4 @ 220V	45.5 @ 220V
	13.1 @ 230V	15.7 @ 230V	21.8 @ 230V	26.1 @ 230V	34.8 @ 230V	43.5 @ 230V
	12.5 @ 240V	15.0 @ 240V	20.9 @ 240V	25.0 @ 240V	33.4 @ 240V	41.7 @ 240V
Rated Current to Grid (A)	13.7 @ 220V	16.4 @ 220V	22.8 @ 220V	27.3 @ 220V	36.4 @ 220V	43.5 @ 220V
	13.1 @ 230V	15.7 @ 230V	21.8 @ 230V	26.1 @ 230V	34.8 @ 230V	43.5 @ 230V
	12.5 @ 240V	15.0 @ 240V	20.9 @ 240V	25.0 @ 240V	33.4 @ 240V	41.7 @ 240V
Max. Current from Grid (A)**	27.3 @ 220V	32.8 @ 220V	45.5 @ 220V	50.0 @ 220V	63.0 @ 220V	63.0 @ 220V
	26.1 @ 230V	31.4 @ 230V	43.5 @ 230V	50.0 @ 230V	63.0 @ 230V	63.0 @ 230V
	25.0 @ 240V	30.0 @ 240V	41.7 @ 240V	50.0 @ 240V	60.5 @ 240V	60.5 @ 240V
Max. Current to Grid (A)	13.7 @ 220V	16.4 @220V	22.8 @ 220V	27.3 @ 220V	36.4 @ 220V	43.5 @ 220V
	13.1 @ 230V	15.7 @230V	21.8 @ 230V	26.1 @ 230V	34.8 @ 230V	43.5 @ 230V
	12.5 @ 240V	15.0 @240V	20.9 @ 240V	25.0 @ 240V	33.4 @ 240V	41.7 @ 240V
Power Factor	0.8 leading ~ 0.8 lagging					
THDi	<3%					
Back-up Side						
Rated Apparent Power (kVA)	3.0	3.6	5.0	6.0	8.0	10.0
Max. Apparent Power (kVA)	Off-grid: 3.0 (6.0, 10s) On-grid: 6	Off-grid: 3.6 (7.2, 10s) On-grid: 7.2	Off-grid: 5.0 (10.0, 10s) On-grid: 10	Off-grid: 6.0 (12.0, 10s) On-grid: 12	Off-grid: 8.0 (16.0, 10s) On-grid: 14.5	Off-grid: 10.0 (20.0, 10s) On-grid: 14.5
Nominal Voltage (V)	220 / 230 / 240, L / N / PE					
Nominal Frequency (Hz)	50/60					
Max. Current (A)	Off-grid: On-grid: 27.3	Off-grid: On-grid: 32.8	Off-grid: On-grid: 45.5	Off-grid: On-grid: 50	Off-grid: On-grid: 63	Off-grid: On-grid: 63
THDv (@Linear Load)	<3%					
On / Off-grid Switching Time (ms)	<10					
Efficiency						
Max. Battery to AC Efficiency	98.0%	98.0%	98.0%	98.0%	97.8%	97.8%
Protection						
Residual Current Monitoring	Integrated					
Battery Reverse Polarity Protection	Integrated					
Anti-islanding Protection	Integrated					
AC Overcurrent Protection	Integrated					
AC Short Circuit Protection	Integrated					
AC Overvoltage Protection	Integrated					
AC Surge Protection	Type II					
Remote Shutdown	Integrated					
General Data						
Operating Temperature Range (°C)	-35 ~ +60 (Derating at +40)					
Relative Humidity	0 ~ 95%					
Max. Operating Altitude (m)	4000 (>2000 derating)					
Cooling Method	Natural convection					
User Interface	LED, WLAN + APP					
Communication with BMS	CAN					
Communication	RS485, WiFi + LAN + Bluetooth					
Communication Protocols	Modbus-RTU, Modbus-TCP					
Weight (kg)	16.9	16.9	16.9	16.9	17.7	17.7
Dimension (W × H × D mm)	800 × 300 × 270					
Noise Emission (dB)	≤30	≤30	≤30	≤30	≤35	≤35
Ingress Protection Rating	IP66					
Mounting Method	Wall / Floor Mounted					
Country of Manufacture	China					

*1: GOODWE ESA series has internal bypass 63A passthrough ability to support whole home backup solution. If the customer don't want to do any breaker upgrade, the max current from grid in SolarGo(or SEMS+) can be set as previous breaker size.

*2: Please visit GoodWe website for the latest certificates.


Technical Data		GW5.1-BAT-D-G20	GW8.3-BAT-D-G20	GW5.1-BAT-D-G21	GW8.3-BAT-D-G21
Rated Energy (kWh)		5.12	8.32	5.12	8.32
Usable Energy (kWh)		5 ^{*1}	8 ^{*2}	5 ^{*1}	8 ^{*2}
Battery Type		LFP (LiFePO ₄)			
Nominal System Voltage (V)		Charge: 420V; Discharge: 380V			
Operating Voltage Range (V) (single phase system)		350 ~ 550			
Operating Voltage Range (V) (three phase system)		700 ~ 950			
Max. Input Current (System) (A)		12	19	12	19
Max. Output Current (System) (A)		13.2	21.0	13.2	21.0
Max. Input Power (System) (kW) ^{*3}		5	8	5	8
Max. Output Power (System) (kW) ^{*3}		5	8	5	8
Peak.Output Power (System) (kW) ^{*3}		7.5 @ 10s	12 @ 10s	7.5 @ 10s	12 @ 10s
Charging Temperature Range (°C)		-18 ~ +55	-18 ~ +55	+2 ~ +55	+2 ~ +55
Discharging Temperature Range (°C)		-20 ~ +55			
Relative Humidity		5 - 95%			
Max. Operating Altitude (m)		4000			
Noise Emission (dB)		≤29			
Communication		CAN			
Weight (kg)		57.5 ± 1	79.0 ± 1	57.5 ± 1	79.0 ± 1
Dimensions (W × H × D mm)		800 × 326 × 270			
Optional Function Configuration		Heating	Heating	-	-
Ingress Protection		IP66			
Max. Storage time		12 months (-20°C ~ +35°C) 6 months (+35°C ~ +45°C)			
Scalability		6 pcs			
Mounting Method		Floor stacked / Wall-mounted			
Country of Manufacture		China			
Standard and Certification	Safety	IEC62619, IEC60730, EN62477, IEC63056, IEC62040, CE, CEC			
	EMC	CE, RCM			
	Transportation	UN38.3, ADR			

*1: Test conditions, 98% DOD (cell 2.85 ~ 3.6V voltage range), 0.2P charge & discharge at 25 ± 2°C for battery system at the beginning of life. Usable energy is defined by its initial design value. Actual available energy may vary depending on charge / discharge rate, environmental conditions (e.g. temperature), transport and storage factors.

*2: Test conditions, 96% DOD (cell 2.85 ~ 3.6V voltage range), 0.2P charge & discharge at 25 ± 2°C for battery system at the beginning of life. Usable energy is defined by its initial design value. Actual available energy may vary depending on charge / discharge rate, environmental conditions (e.g. temperature), transport and storage factors.

*3: Max. Input Power / Max. Output Power / Peak.Output Power derating will occur related to Temperature and SOC.

*: Please visit GoodWe website for the latest certificates.

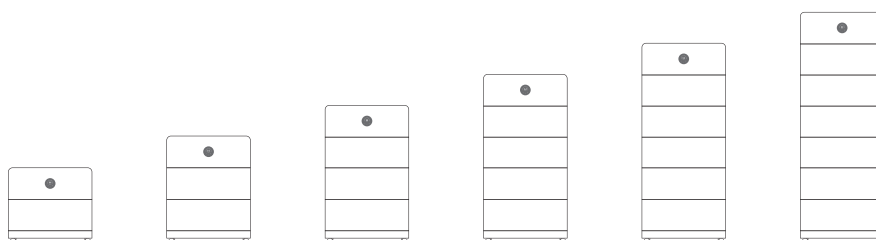

Number of Battery Modules (pcs)	1	2	3	4	5	6
Total Energy Capacity (kWh)	5.12	10.24	15.36	20.48	25.60	30.72
Total Energy Capacity (kWh)	8.32	16.64	24.96	33.28	41.60	49.92