

ESA Series

3-10kW/5-48kWh | Single Phase Home Storage Solution (HV)

The GoodWe ESA Series is a fully integrated all-in-one solar and storage solution that combines inverter and battery in a pre-wired, modular design-making installation significantly faster and easier. Engineered for flexibility, the ESA system allows seamless expansion to meet evolving energy needs. 5kWh and 8kWh battery modules support 1C charging/discharging and can be mixed in a single stack up to 48kWh, with up to 6x stacks in parallel. The ESA provides UPS-level, full house back-up (63A) with no gateway needed. Models feature 2-4 MPPTs, each supporting up to 26A short-circuit input current. Safety features include 6-level battery protection and AI-driven AFCI 3.0 as standard, plus low noise levels of <35dB makes the ESA suitable for a wide variety of applications.



*Initial stock may be supplied in a gloss white finish.



Optimized Performance

- 1C charge/discharge for rapid energy cycling
- Fanless design for quiet operation, noise <35dB
- 20A per string & 200% PV oversizing



Flexible & Adaptable Applications

- Dual output ports for simplified installation & off-grid capability
- Flexible battery mixing with different capacity or old&new batteries
- Support full backup load with 63Ax5 output



Superb Safety & Reliability

- Advanced 6-layer safety protection
- Heating mode ensures reliable performance even in -20°C
- AI-driven AFCI 3.0 for safety¹



Smart Control & Monitoring

- Seamless switching to backup <4ms
- One-click upgrade & one-click configuration

Technical Data	GW3K-EHA-G20	GW3.6K-EHA-G20	GW5K-EHA-G20	GW6K-EHA-G20	GW8K-EHA-G20	GW9.99K-EHA-G20
Battery Side						
PV Side						
AC Side (On-grid)						
Back-up Side						
Efficiency						
Protection						
General Data						

*1: If there's no PV, start-up voltage will be 380V.
 *2: When the input voltage is 560V-600V, the inverter will enter standby mode, and the voltage returns to 560V to enter the normal operation state.
 *3: Please refer to the user manual for the MPPT Voltage Range at Nominal Power.

*4: GOODWE ESA series has internal bypass 63A passthrough ability to support whole home backup solution. If the customer don't want to do any breaker upgrade, the main breaker size in SolarGo (or SEMS+) can be set as previous breaker size.
 *5: If the Back-up port is not used, select an appropriate circuit breaker based on the AC Max. Output Current.
 *: Please visit GoodWe website for the latest certificates.

ESA Series / Battery Module

GOODWE


Technical Data	GW5.1-BAT-D-G20	GW8.3-BAT-D-G20	GW5.1-BAT-D-G21	GW8.3-BAT-D-G21
Rated Energy (kWh)	5.12	8.32	5.12	8.32
Usable Energy (kWh)	5 ^{*1}	8 ^{*2}	5 ^{*1}	8 ^{*2}
Battery Type		LFP (LiFePO ₄)		
Nominal System Voltage (V)		Charge: 420V; Discharge: 380V		
Operating Voltage Range (V) (single phase system)		350 ~ 550		
Operating Voltage Range (V) (three phase system)		700 ~ 950		
Max. Input Current (System) (A)	12	19	12	19
Max. Output Current (System) (A)	13.2	21.0	13.2	21.0
Max. Input Power (System) (kW) ^{*3}	5	8	5	8
Max. Output Power (System) (kW) ^{*3}	5	8	5	8
Peak Output Power (System) (kW) ^{*3}	7.5 @ 10s	12 @ 10s	7.5 @ 10s	12 @ 10s
Charging Temperature Range (°C)	-18 ~ +55	-18 ~ +55	+2 ~ +55	+2 ~ +55
Discharging Temperature Range (°C)		-20 ~ +55		
Relative Humidity		5 - 95%		
Max. Operating Altitude (m)		4000		
Noise Emission (dB)		≤29		
Communication		CAN		
Weight (kg)	57.5 ± 1	79.0 ± 1	57.5 ± 1	79.0 ± 1
Dimensions (W x H x D mm)		800 x 326 x 270		
Optional Function Configuration	Heating	Heating	-	-
Ingress Protection		IP66		
Max. Storage time		12 months (-20°C ~ +35°C) 6 months (+35°C ~ +45°C)		
Scalability		6 pcs		
Mounting Method		Floor stacked / Wall-mounted		
Country of Manufacture		China		
Standard and Certification	Safety EMC Transportation	IEC62619, IEC60730, EN62477, IEC63056, IEC62040, CE, CEC, VDE2510 CE, RCM UN38.3, ADR		

*1: Test conditions, 98% DOD (cell 2.85 ~ 3.6V voltage range), 0.2P charge & discharge at 25 ± 2°C for battery system at the beginning of life. Usable energy is defined by its initial design value. Actual available energy may vary depending on charge / discharge rate, environmental conditions (e.g. temperature), transport and storage factors.

*2: Test conditions, 96% DOD (cell 2.85 ~ 3.6V voltage range), 0.2P charge & discharge at 25 ± 2°C for battery system at the beginning of life. Usable energy is defined by its initial design value. Actual available energy may vary depending on charge / discharge rate, environmental conditions (e.g. temperature), transport and storage factors.

*3: Max. Input Power / Max. Output Power / Peak Output Power derating will occur related to Temperature and SOC.

*: Please visit GoodWe website for the latest certificates.

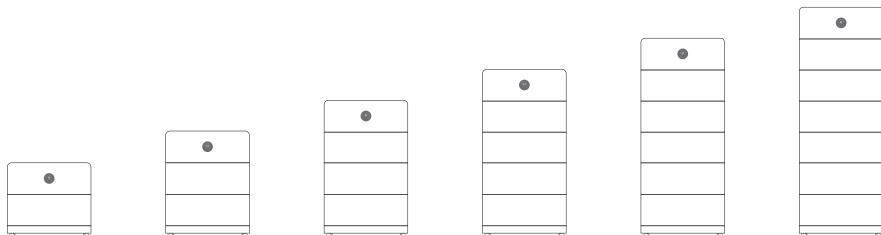

Number of Battery Modules (pcs)	1	2	3	4	5	6
Total Energy Capacity (kWh)	5.12	10.24	15.36	20.48	25.60	30.72
Total Energy Capacity (kWh)	8.32	16.64	24.96	33.28	41.60	49.92